



# RELIABLE AND EXCLUSIVE CONTROL FOR GAS DETECTION

Features the Honeywell Modbus Master Protocol available exclusively for Honeywell Sensepoint XCL and XRL gas detectors

---

PolyGard®2 Multi-Gas Controller MGC2-K

---

**Honeywell**

# GAS PROTECTION FOR COMMERCIAL AND LIGHT INDUSTRIES

When leaks of combustible or toxic gases occur, the PolyGard®2 multi-gas controller enables you to take immediate action to protect people and systems.

The PolyGard®2 Multi-Gas Controller MGC2-K is designed for detection of toxic, combustible, or dangerous gases in many commercial and industrial applications.

Three analog sensors with a 4–20 mA signal and eight digital sensors via RS-485 communication from Sensepoint XCL and XRL sensors can be connected to the controller, which helps to reduce installation costs.


The controller monitors the measured values and activates the alarm relays if the set local alarm thresholds for pre-alarm and main alert have been exceeded or if there are alarm messages coming from the eight digital sensors.

The controller includes the Honeywell Modbus Master Protocol available exclusively for Honeywell Sensepoint XCL and XRL gas leak detectors.

## KEY FEATURES

- Internal function monitoring with integrated hardware watchdog
- Hardware and software according to SIL2-compliant development process
- Reverse-polarity protected; overload and short-circuit proof
- Three analog inputs 4–20 mA
- Three relays with change-over contact, potential-free max. 250V AC, 5 A
- Two transistor outputs, 24V DC, 0.1 A (plus switching)
- Serial RS-485 interface with Modbus protocol
- Display with multicolor power LED

## Industrial and Commercial Controller System

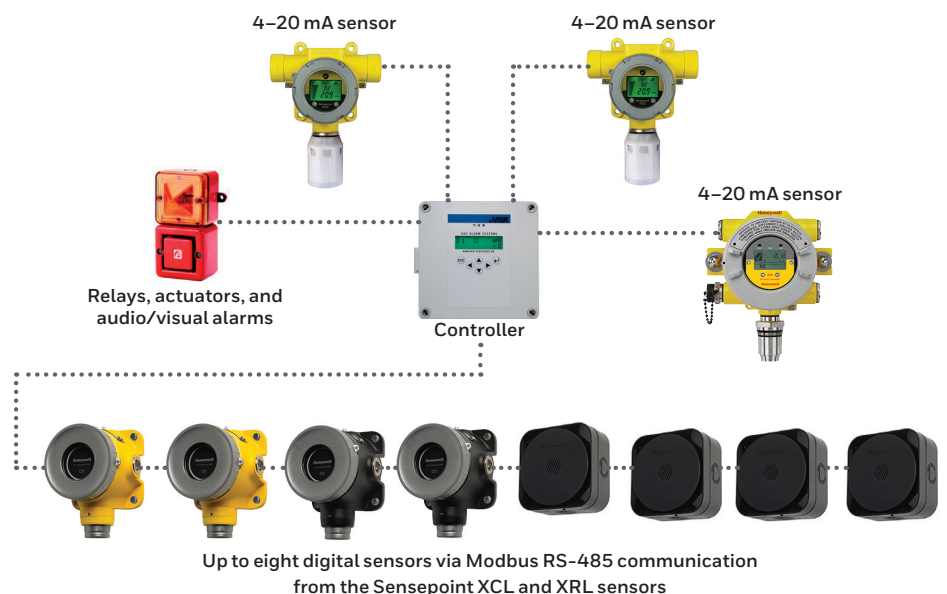

## INDUSTRIAL AND COMMERCIAL APPLICATIONS:

- Waste Water
- Power Generators
- Vehicles / Engines
- Laboratories
- Food Processing / Beverages
- Hospitals
- Boiler Rooms
- Transportation
- Parking Garages



## GENERAL SPECIFICATIONS

ELECTRICAL	Power supply	24V DC $\pm$ 20%, reverse-polarity protected, 24V AC $\pm$ 15%
	Overvoltage category	I
	Power consumption (24V DC)	Control board Per sensor (analog) Horn / warning light
	Alarm relays (3)	Max. 60 mA (1.5 VA), without sensor Max. 85 mA (2.1 VA) Max. 40 mA (1.0 VA)
	Transistor output (2)	240V AC, 5 A, potential-free, change-over contact (SPDT)
	Digital input (2)	24V DC / 0.1 A (switching to plus) (only at 24V DC power supply)
	Analog input (3)	Potential-free
	Analog output signal (1)	4–20 mA overload and short-circuit proof, input resistance 200 $\Omega$ Proportional, overload and short-circuit proof, load $\leq$ 500 Ohm 4–20 mA = measuring range 3.0 < 4 mA = underrange 24V DC $\pm$ 20%, 24V AC $\pm$ 15%, reverse-polarity protected >20–21.2 mA = overrange 2.0 mA = fault (not preset)
AMBIENT CONDITIONS	Temperature range	-25°C to +50°C (-13°F to +122°F)
	Humidity range	15–95% RH non-condensing
	Storage temperature	+5°C to +40°C (+41°F to +104°F)
SERIAL INTERFACE	Field bus	RS-485 / 19,200 Baud
	Tool bus	2-wire / 19,200 Baud
PHYSICAL	Housing type C	Polycarbonate
	Combustion	UL94 V2
	Housing color	RAL 7032 (light grey)
	Dimension housing (W x H x D) Type C	130 mm x 130 mm x 75 mm (5.12 in x 5.12 in x 2.95 in)
	Weight	Approximately 0.6 kg (1.32 lb)
	Protection class	NEMA 4X (IP65)
	Installation	Wall mounting
	Knockouts for cable and sensor entry	Standard 6 x M20/25
	Wire connection:	Digital input, analog output Power supply, relays
DIRECTIVES		EMC directives 2014/30/EU Low voltage directive 2014/35/EU CE EN 61010-1:2010
WARRANTY		1 year on device
LCD DISPLAY	LCD	Two lines, 16 characters each, background highlighted in two colors
	Operation	Menu-driven via six push-buttons
	Power consumption	5 V, 60 mA, 0.3 VA

## For more information

[www.honeywellanalytics.com](http://www.honeywellanalytics.com)  
[www.HoneywellSafety.com](http://www.HoneywellSafety.com)

## Europe, Middle East, Africa

Life Safety Distribution GmbH  
Tel: 00800 333 222 44 (Freephone number)  
Tel: +41 44 943 4380 (Alternative number)  
Middle East Tel: +971 4 450 5800 (Fixed Gas Detection)  
[gasdetection@honeywell.com](mailto:gasdetection@honeywell.com)

## Americas

Honeywell Analytics Distribution Inc.  
Tel: +1 847 955 8200  
Toll free: +1 800 538 0363  
[detectgas@honeywell.com](mailto:detectgas@honeywell.com)  
Honeywell RAE Systems  
Phone: +1 408 952 8200  
Toll Free: +1 888 723 4800

## Asia Pacific

Honeywell Analytics Asia Pacific  
Tel: +82 (0) 2 6909 0300  
India Tel: +91 124 4752700  
China Tel: +86 10 5885 8788-3000  
[analytics.ap@honeywell.com](mailto:analytics.ap@honeywell.com)

## Technical Services

EMEA: [HAexpert@honeywell.com](mailto:HAexpert@honeywell.com)  
US: [ha.us.service@honeywell.com](mailto:ha.us.service@honeywell.com)  
AP: [ha.ap.service@honeywell.com](mailto:ha.ap.service@honeywell.com)

HIS\_GAS\_DS\_PolyGard-MSR\_Bro\_US-ENa\_08/19  
© 2019 Honeywell International Inc.

**THE  
FUTURE  
IS  
WHAT  
WE  
MAKE IT**

**Honeywell**